



Fire Technology
مصنع تقنية الإطفاء

Hollow Metal Doors & Frame Catalogue



ISO 9001:2008



Leading National Factories for Hollow Metal Doors & Frame and Fire fighting Equipments.

INDEX



Fire Technology Factory		
01	Introduction	05
02	Factory Machinery	06
03	International Certificates	08
04	Hollow Metal Doors	10
05	Suggested Door Levels & Applications	13
06	Basic Door Styles	14
07	Fire Ratings	15
08	Fire Door Opening Direction	16
09	Door Frames	17
10	Type of Insulation	19
11	Hardware Details	20
12	Fire Zone & Access Doors	23
13	Door Seal	24
14	Standard Colour	25

Errors & Omissions
Every effort has been made to ensure the accuracy and completeness of this Catalogue. The information herein is subject to some interpretation, and from time to time, the data sheets will be updated whenever it is deemed necessary as new tests are conducted, new products and technologies are introduced and as specifications are revised



Fire Technology

مصنع تقنية الإطفاء

An introducing our selves – we are Fire Technology Factory – it is worth to say that we are one of the Leading National Factories in Saudi Arabia working in the field of Manufacturing Fire Fighting Equipment which includes:-

- 01 Hollow Metal Doors & Frame (UL Listed Fire Rated / Non Fire Rated).
- 02 Fire Hose Reel (Rubber / Synthetic) Cabinets (All Types).
- 03 Fire Hose Rack Cabinets (All Types).
- 04 Fire Suppression System (FM 200, CO₂, Novec1230, Fire Trace).
- 05 Water Mist System.
- 06 Foam Systems (Stationary, Mobile).
- 07 Foam Bladder Tanks (All Types).
- 08 Fire Pumps (All Capacities & Types).
- 09 Beside Other Related Industries.

Our Factory has holding International certificates such as Quality Management System (ISO 9001: 2008), International certificate of American underwriters laboratories (UL) for Fire Rated Doors and we are member of (NFPA) National Association Fire Protection.

Our factory is equipped with the latest and most modern CNC machinery to co-op with the advanced & most accurate products in Fire Fighting Equipment filed as well as to increase our productivity to satisfy our customer's need on time.

Beside high advanced machinery also have Engineering / Design Department & Technicians are very Educated & Trained for the jobs to assign. We look forward make mutual & fruitful business with your esteemed establishment. For any clarification, please feel free to contact us at the following:-

Fire Technology
مصنع تقنية الإطفاء

Tel : +9661 478 3303
Fax : +9661 292 2316
P.O. Box : 235222 Riyadh 11371

info@firetecsa.com
www.firetecsa.com

Some of our Partners

SIEMENS

GIACOMINI
Technology in Comfort

Danfoss
SEMCO
FIRE PROTECTION


HOCHIKI

CROKER

Factory Machinery

- CNC Punching Machine.
- CNC Bending Machine.
- NC Shearing Machine.
- Corner Cutting Machine.
- Corner Drilling Machine.
- Polyurethane Filling Machine.
- Mig welding Machine.
- Spot welding Machines.
- Arc Welding Machines.
- General tools
- Powder Coating Line (35M x 25M).
- Chemical Treatment Line.
- Spray Painting booth.
- Multi Layers Pressing Machine (Hydraulic).



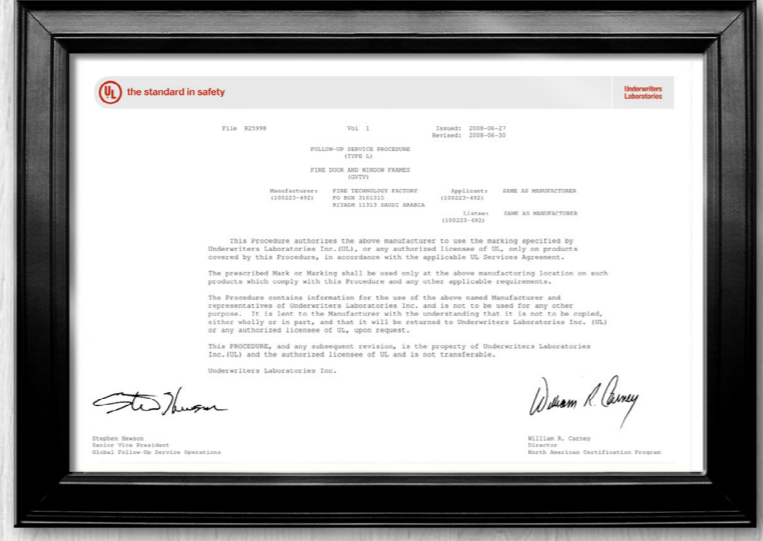

ISO 9001:2008





Hollow Metal Doors & Frame

Hollow Metal Doors & Frame



Our innermost interest is to gain high client's specifications from high quality products which comply the international standards.

Our capabilities in manufacturing and design allow us to customize our client specifications.

To ensure high a manufacturing accuracy , on time delivery and easy installation , our factory is equipped with the latest CNC machines and utilizing the best materials beside skilled and well experienced technicians.













Fire Door Sets:

We provide the fire door series different grades and various sizes applicable for any place. The design is made strictly following the International Standards. The Fire door has strong fire resisting stability, High performance of fire resisting integrity, and extraordinary thermal Insulation, appropriate for being used in building structures with high fire resisting requirement, and place densely populated.

Suggested Door Levels & Applications

Building Types	Standard Steel Door Levels				Door Design Nom
	Level 1 Standard Duty	Level 1 Heavy Duty	Level 3 Extra Heavy Duty	Level 4 Maximum Duty	
					FTF100
					FTG100
					FTV100
					FTFG100
					FTNV100
					FTTL100
Apartment					
Main Entrance	○				
Unit Entrance		○			
Bedroom	○				
Bathroom	○				
Closet	○				
Stairwell		○			
Dormitory					
Main Entrance		○			
Unit Entrance	○	○			
Bedroom	○				
Bathroom	○				
Closet	○				
Stairwell		○			
Hotel - Motel					
Unit Entrance	○	○			
Bathroom	○				
Closet	○				
Stairwell		○			
Storage & Utility		○			
Hospital - Nursing Home					
Main Entrance		○			
Patient Room		○	○		
Stairwell		○	○		
Operating & Exam		○	○		
Bathroom		○	○		
Closet		○	○		
Recreation		○	○		
Kitchen		○	○		
Industrial					
Entrance & Exit		○			
Office		○			
Production		○	○		
Toilet		○	○		
Tool		○	○		
Trucking		○	○		
Monorail		○	○		
Office					
Entrance		○			
Individual Office		○			
Closet		○			
Toilet		○	○		
Stairwell		○	○		
Equipment		○	○		
Boiler		○	○		
School					
Entrance & Exit		○			
Classroom		○			
Toilet		○			
Gymnasium		○			
Cafeteria		○			
Stairwell		○			
Closet		○			

Basic Door Style

	FTF 100 Fire Technology Flush Type		FTG 100 Fire Technology Glass Type
	FTV 100 Fire Technology Vision Type		FTDG 100 Fire Technology Double Glass Type
	FTVL100 Fire Technology Vision & Louver Type		FTGL 100 Fire Technology Glass & Louver Type
	FTNV100 Fire Technology Narrow Vision Type		FTFG 100 Fire Technology Full Glass Type
	FTNVL100 Fire Technology Narrow Vision & Louver Type		FTDL 100 Fire Technology Double Louver Type
	FTTL 100 Fire Technology Top Louver Type		FTFL 100 Fire Technology Full Louver Type

Fire Ratings


Opening	Door and Frame Rating	Description and Use
	3 - 2 Hours (180-120 min.)	These openings are in walls that separate buildings or divide a single building into designated fire areas.
	1-1/2 Hour (90 minute)	Openings of this type are used in enclosures of vertical communication or egress through buildings. Examples of these types of openings include stair walls and elevator shafts.
	1 Hour (60 minute)	These door and frame assemblies divide occupancies in a building.
	3/4 Hour (45 minute)	For use where there are openings in corridors or Room partitions.
	1-1/2 Hour (90 minute)	This opening is in a wall where there is the potential exterior of the building.
	3/4 Hour (45 minute)	This opening is in an exterior wall that has the potential to be exposed to moderate to light fire from the exterior of the building.
	1/3 Hour (20 minute)	These openings are in corridors where smoke and draft control is required. The minimum wall rating is 1/2 hour.




Single Doors




Double Doors

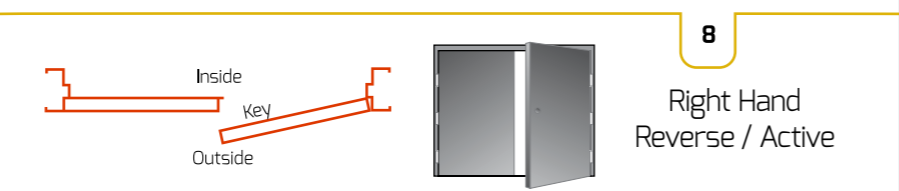

All applications of door frames are manufactured standard thickness, all doors hardware are supported with additional steel reinforcing plates.

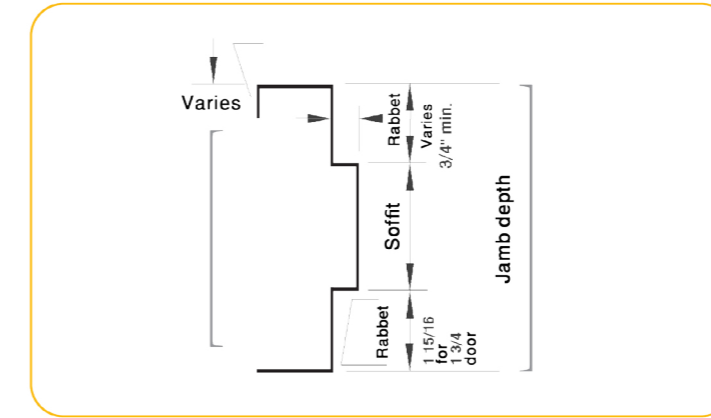


DOUBLE RABBET

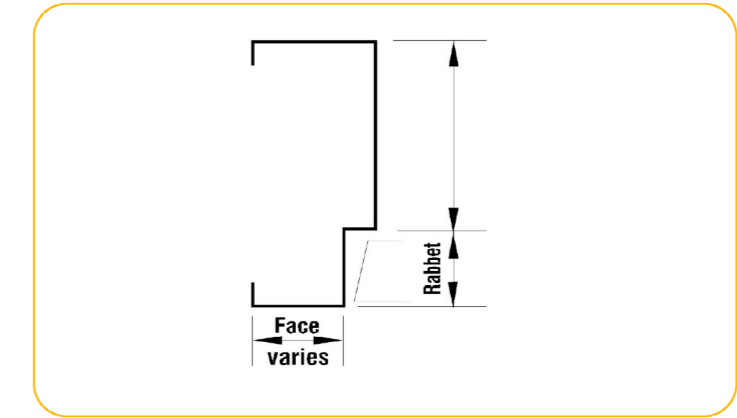


SINGLE RABBET

OTHER FRAMES PROFILE

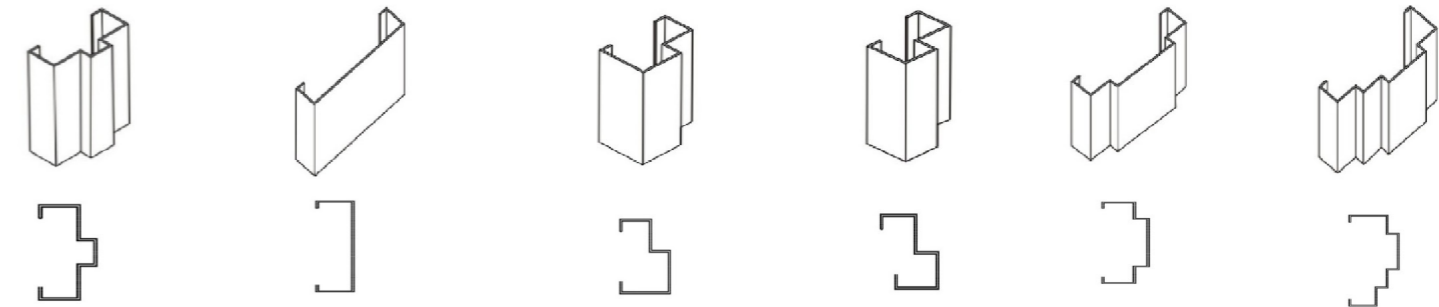


Note: Dimensions & Specification are international standards (Height, Width, Depth & Thickness) also available upon the request.


WELDED TYPE

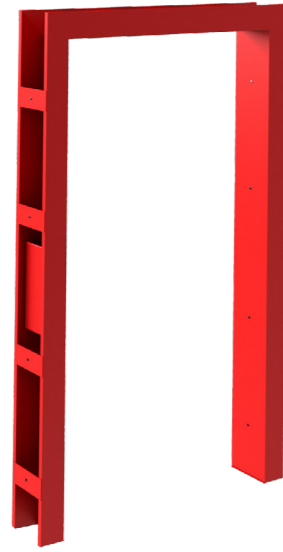


KNOCK - DOWN TYPE

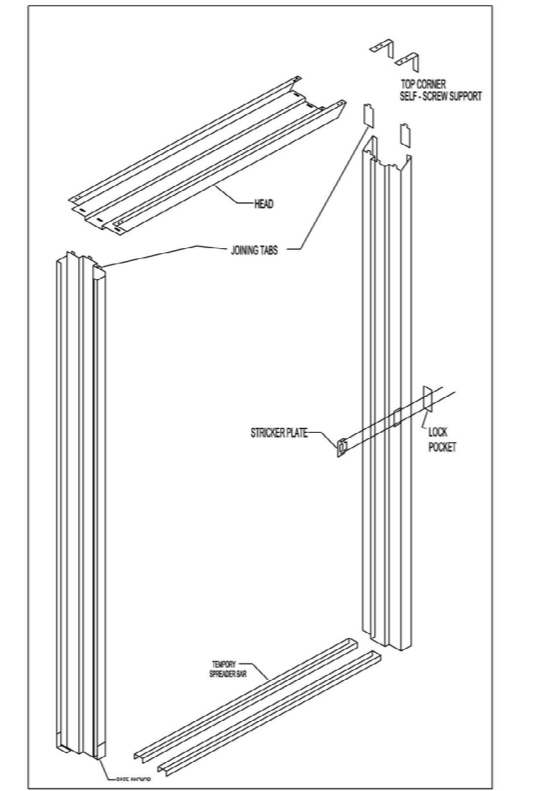


FRAME ACCESSORIES




Hinge



Welded in floor anchor



Anchor Support



Anchor

Notes:

- All Specs Door Frames are supplied with fully Engineered «Slot and Tab» corner connection methods. This ensures the highest level of accuracy and mechanical strength.
- Frames can be site assembled or where they are welded for additional strength, ground flush and primed to improve their aesthetic appearance.
- Is available Knock Down or welded. All other frames with custom face dimensions must be welded prior to installation.




Polyurethane Core

Polyurethane Core are two component fluorocarbon blown spray system, based on polymeric MDI & produced rigid, closed cell urethane foam having a normal core density of 35kg/m².

Designed with good temperature range & is suitable for application in high ambient temperature.


Factory applied from our computerized injection machine.

Commonly used for non-fire rated door range.

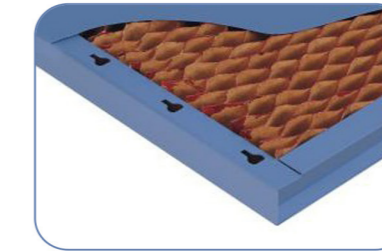

Honeycomb Core

Honeycomb Core is made from layers of paper or cardboard together by parallel & uniformly spaced lines of adhesive, light weight & high strength. Glued to the interior surface of the door skin in door leaf is the pressed for a couple of hours to maintain the flatness of the door. Compressive strength is equal to 1.4kg/m, Commonly used for UL 10B fire rated doors.

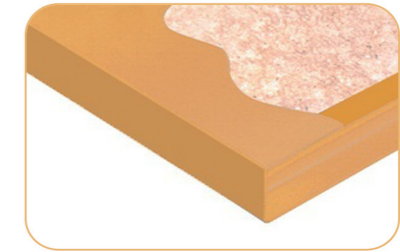


Rock Wool / Mineral Core

Rock Wool / Mineral Core made from molten basalt rocks spun to fine fibers & bonded with thermosetting phenol resin used for thermal insulation, acoustical & fire barrier.

provide with suitable vertical stiffeners.


Commonly used for our fire rated doors.

Hardware Locations

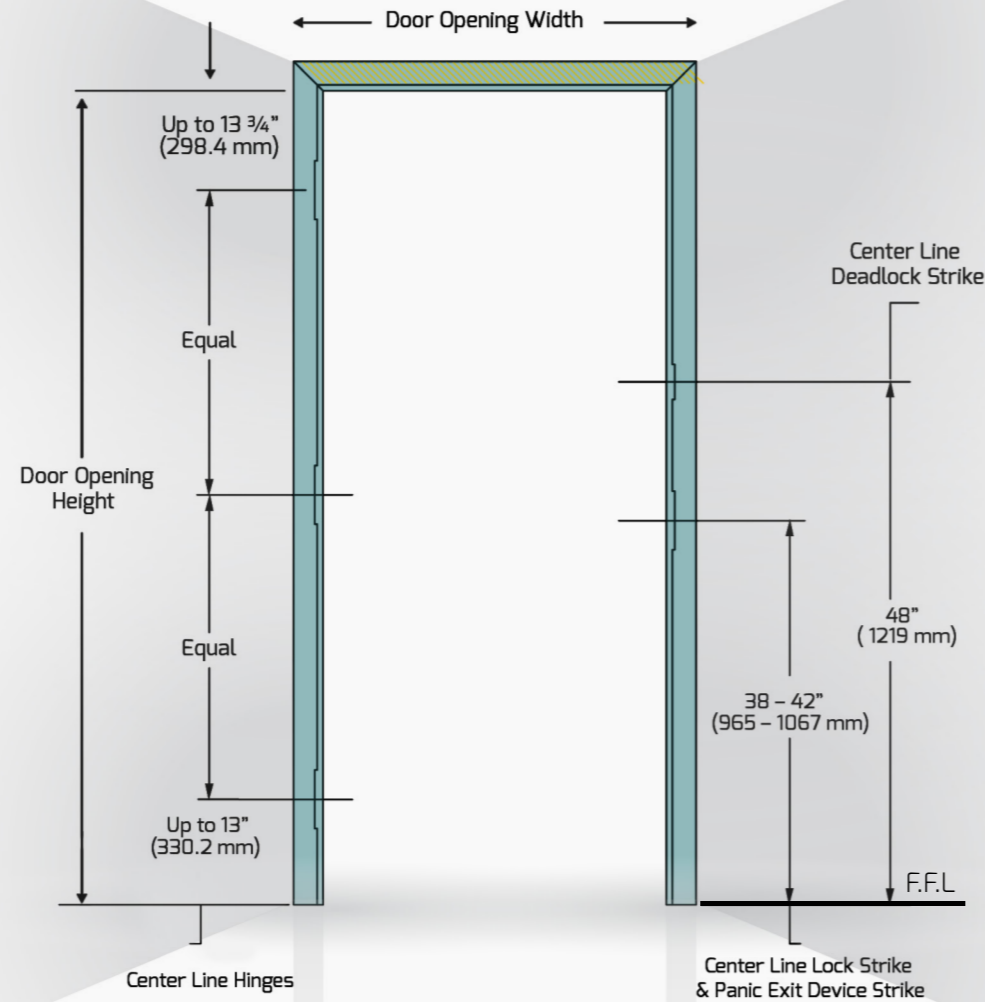

Door Hardware (Accessories)

MORTISE PANIC DEVICE

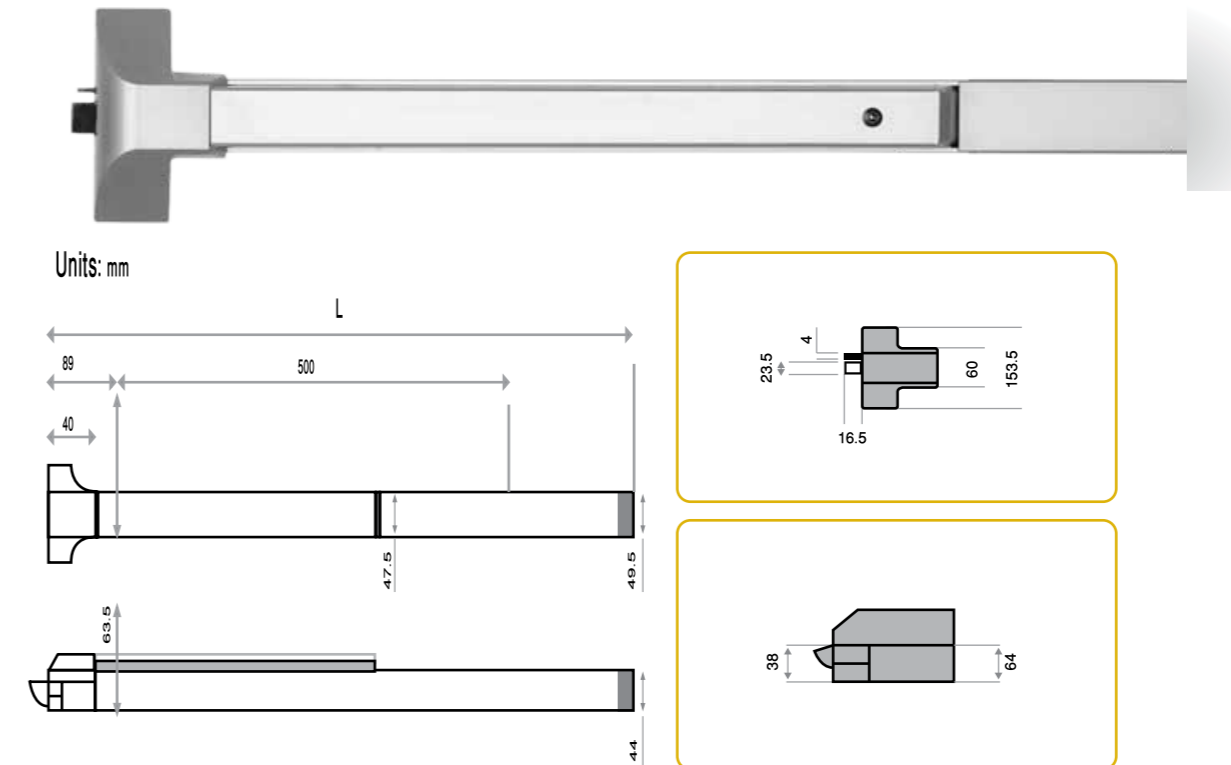

Device 33" and 42"

Material

- Head Cover Zinc ally / Stainless Steel.
- Chassis Steel painted / Stainless Steel.
- End Cap Steel Painted / Stainless Steel.

RIM FIRE EXIT DOOR



- Non - handed
- A lateral lock point, Stainless steel or Zinc latch bolt.
- The standard oval shape horizontal bar:900mm.
- CE marked for safety.
- Certified for use on the fire doors.
- Assembly instructions and installation template.

Door Hardware Accessories



DOOR CLOSER




STAINLESS STEEL HINGE



LEVER HANDLE



LEVER HANDLE "L" TYPE

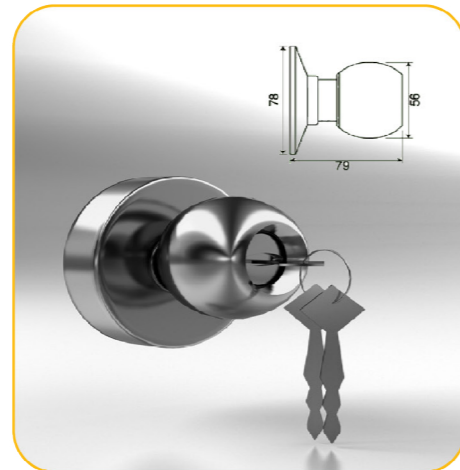

ROUND LOCK



FLUSH BOLT


Fire Zone & Access Doors



FIRE ZONE DOORS:


Separation of corridors is essential for fire protection, but unfortunately most fire doors are heavy and difficult to move. As a result they are often propped open, defeating the purpose of having a fire door in the first place.

Fire Technology Factory Fire Zone door package; consisting of Swing master & Power Swing automatic door operator, offers both fire protection and convenient hands – free access in every corridor.



Magnetic Door Holder

Magnetic door holder is designed to retain a fire door open, against the force of its own closing device. In the event of a fire, the door holder magnet can be turned off by the fire alarm, allowing the door to shut. An optional Floor mounting bracket is also available. There are 2 versions, 24 V DC and 240 V AC. The 24 V DC door holder requires either a panel with a 24 V DC output, or a separate 24V PSU (Power Supply Unit). This can be switched through the FACP (Fire Alarm Control Panel) aux relay, but it might need back EMF diodes fitted to the Door Holder



Push Plate Sign

Swing Hinges



ACCESS DOORS:

The access door industry in the 21st century is one that requires in depth knowledge of the industry, constant customer contact and adaptability to the changing demands of the market place. We continue to accomplish that in this competitive business environment.

Although we are able to be flexible in the market both Nationally and internationally, one thing has remained constant through the years: Our absolute commitment to the highest and most consistent quality of our products in the access door industry.



ACCESS DOOR HINGE




ALLEN KEY LOCK




Life safety are door sets which have smoke leakage, and also fire ratings. In recent years the demand for (Smoke Door) has increased, lagly due to the proliferation of Fire Engineered building. In many cases the door set required by the Fire Engineer's design calls for both smoke and fire resistance. Only Life Safety Doors offer a tested and certified solution for smoke/fire applications in both single and pair door combinations.

Application:


- Relief from slamming.
- Fire resistant.
- Stops light.
- Smoke seal.
- Dust seal.
- Durable.
- Unobtrusive.
- Total protection from traffic.

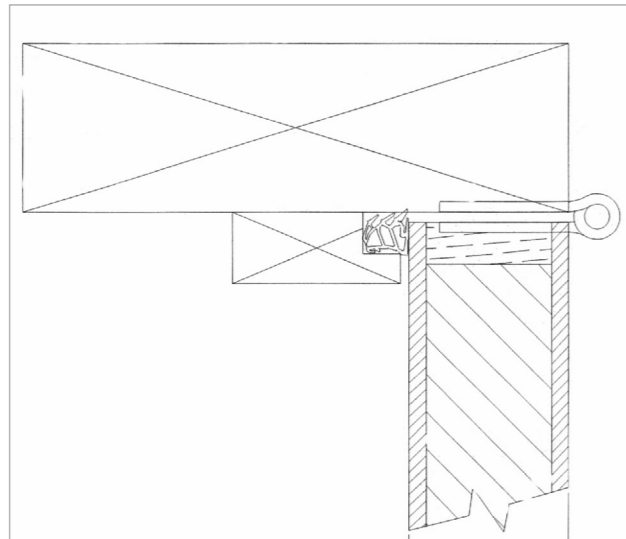

Typical Detail for Steel Door Frame

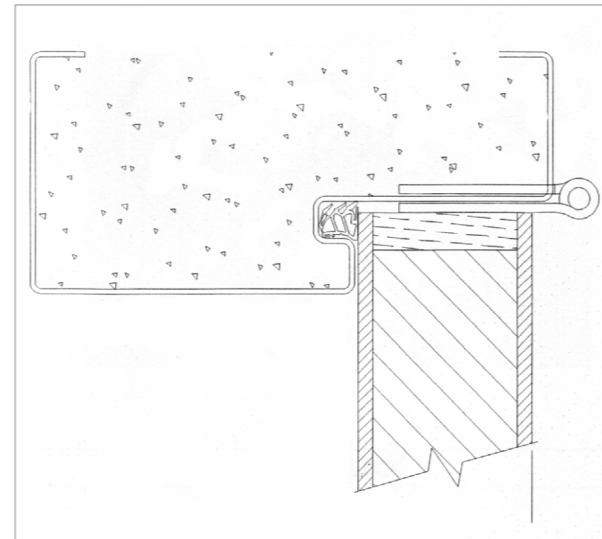


Typical Detail for Timber Door Frame

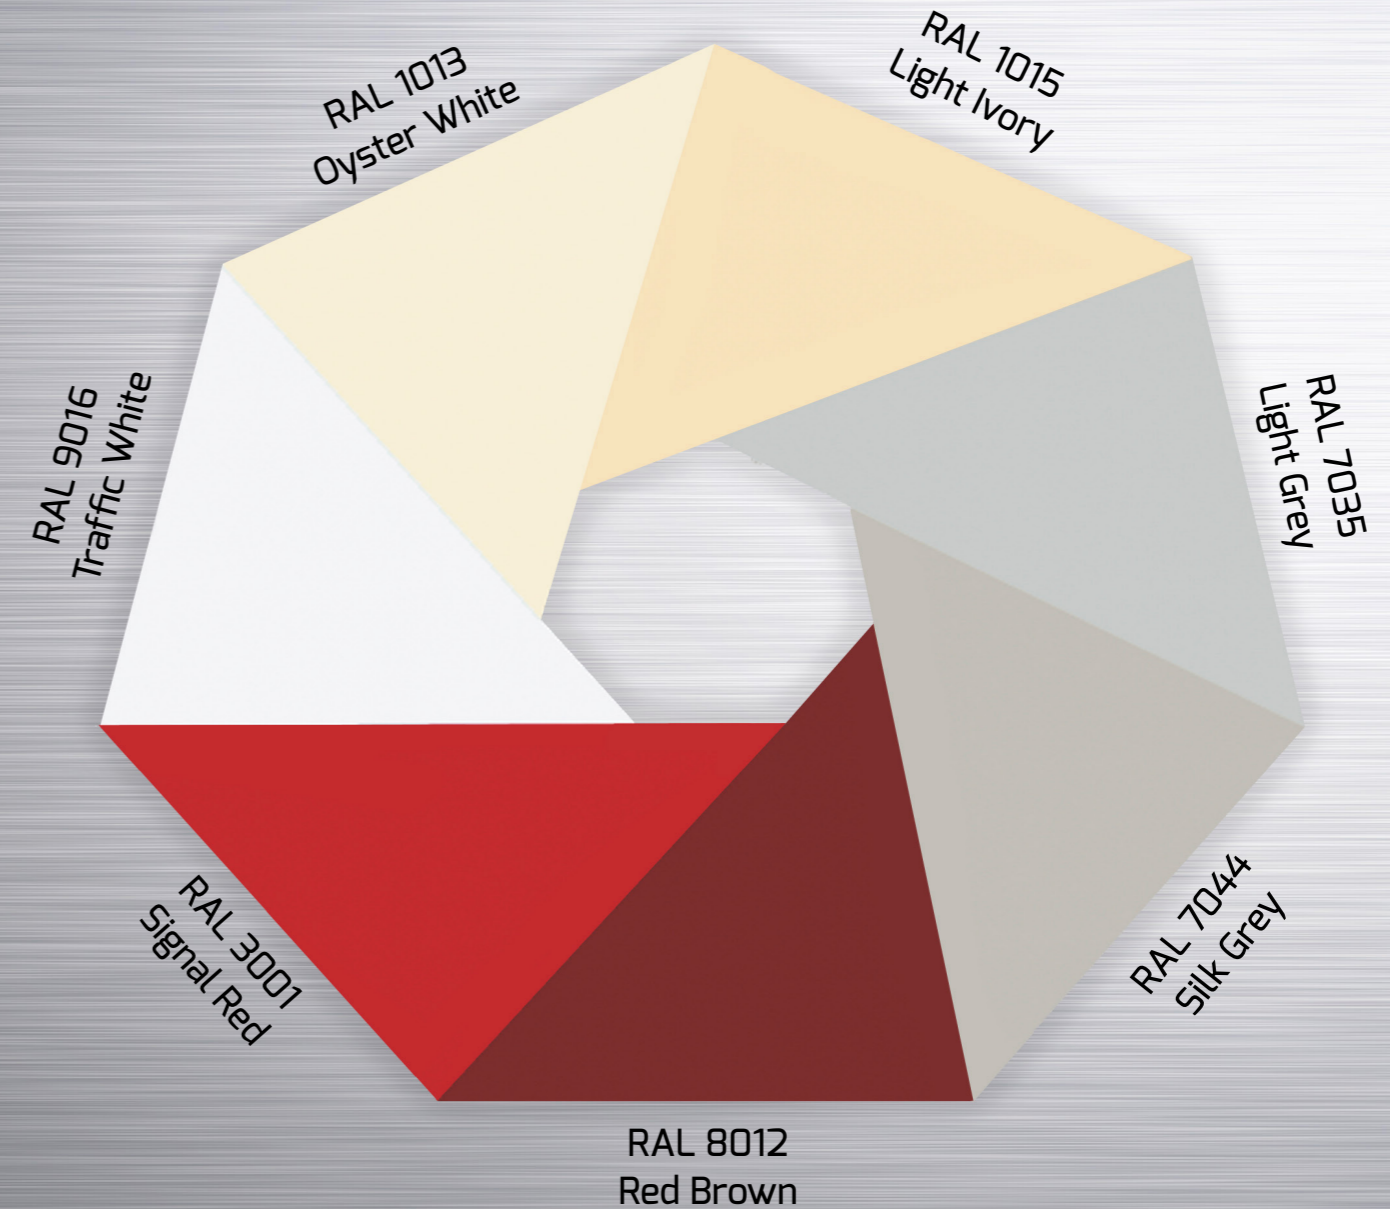

Notes:





Fire Technology
مصنع تقنية الإطفاء

Saudi Arabia – Riyadh – Head Office

Tel : +9661 478 3303

Fax : +9661 292 2316

P.O. Box: 235222 Riyadh 11371

Email: info@firetecsa.com

website: www.firetecsa.com